

## SmartTab Cases - CT3193 & CT3197

### CT3193 - DynaFlex II Go Installation



- 1 Pull the strap on the case aside to reveal the locking tab.



- 2 Slide the locking tab to the right so that the unlocked symbol is fully revealed.



- 3 Slide the cover forward and lift it from the case.



- 4 Align the USB-C connector in the case with the port of the DynaFlex II Go payment device.



- 5 Seat the DynaFlex II Go device into the case.



- 6 Place the cover over the DynaFlex II Go device.



- 7 Slide the locking tab to the left so that the lock icon is fully visible.

# SmartTab Cases - CT3193 & CT3197

## CT3197 - iPhone Installation



- 8** Slide the lock tab to the right so that the unlocked symbol is fully revealed.



- 9** Remove the cover from the iPhone case.



- 10** Align the tabs on the DynaFlex II Go case with the slots on the iPhone case.



- 11** Place the DynaFlex II Go case onto the iPhone case.



- 12** Slide the DynaFlex II Go case down and into place.

### Optional: Locking Cases Together



- 13a** Locate the 2 screw holes on the inside of the iPhone case.




- 13b** Insert and tighten the 2 small provided screws. This will lock the 2 cases together.

### iPhone 15 Pro Max Option



- 14a** Due to the size difference of the iPhone 15 Pro Max, a spacer will need to be used. Begin by using the provided alcohol wipe to clean to top edge of the device. Allow it to dry completely.

## SmartTab Cases - CT3193 & CT3197

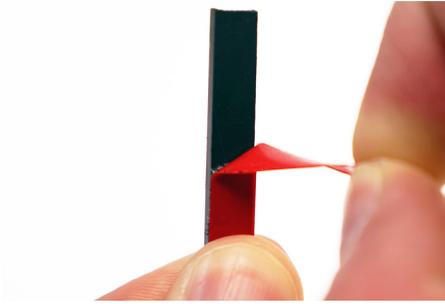

**14b** Pull the red tab on the spacer to expose the adhesive.



**14c** Center the spacer onto the top of the iPhone 15 Pro Max and apply pressure for at least 10 seconds.



**15** Slide the iPhone into the case. Ensure that the USB-C connector plugs into the port on the iPhone.



**16** Slide the DynaFlex II Go case down to expose the locking tab. Replace the cover onto the iPhone case.



**17** Slide the locking tab to the left so that the lock icon is fully visible.

### Charging



**18a** The cases can be charged using the gang charger. The LED next to the bay on the charger where the cases are placed will blink to indicate charging. Both devices will be charged when connected.



**18b** The cases can also be charged by using the single position charger. Ensure that the charger is connected to the iPhone case.

### Important Note:

Placement in the gang charger or connection to the single charger should be to the iPhone case so both devices will charge. See the icons on the bottom of iPhone case indicating 2 devices. If the charger is connected to the DynaFlex II Go case, only the DynaFlex II Go will charge.



## Cleaning Note:

It is recommended that the charging contacts on the handheld, tablet and payment terminal cases be cleaned once a month or when the contacts appear dirty. When cleaning, do NOT spray any cleaning solution directly onto the contacts, apply the solution to a clean cloth and use that to clean the contacts. Isopropyl alcohol or any bleach free disinfecting wipes are acceptable for use.

## FCC Compliance

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

**Model: NE360S**

**Made in China**

## ISED Regulatory Compliance

This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions:

- (1) This device may not cause interference.
- (2) This device must accept any interference, including interference that may cause undesired operation of the device.

This equipment complies with IC RSS-102 radiation exposure limits set forth for an uncontrolled environment.

L'émetteur/récepteur exempt de licence contenu dans le présent appareil est conforme aux CNR d'Innovation, Sciences et Développement économique Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :

- (1) L'appareil ne doit pas produire de brouillage;
- (2) L'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

Cet équipement est conforme aux limites d'exposition aux radiations IC CNR-102 établies pour un environnement non contrôlé.

SD1006 Rev1 01/29/25