


L430 Low Profile Ramp PL746



- 1 Use a screwdriver to remove one of the screws holding the original ramp to the lock.

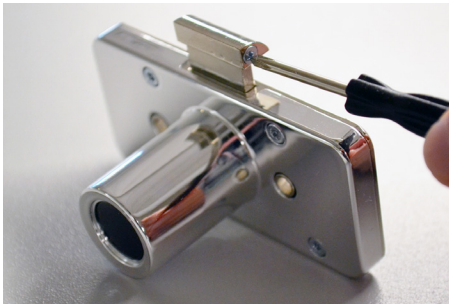

- 2 Remove the other screw.



- 3 Remove the original ramp from the lock.



- 4 Place the new PL746 ramp onto the lock.



- 5 Reinsert and tighten the 2 screws.

Note: See the instructions included with the L430 lock for full installation information.

SD0917 Rev0 03/14/23