




Zips! Power Locking Noose Sensor AC123

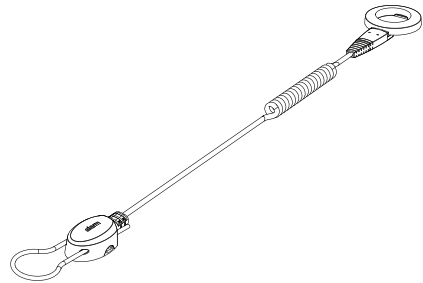


- 1 Wipe merchandise with alcohol wipe provided. **Let it dry completely.**

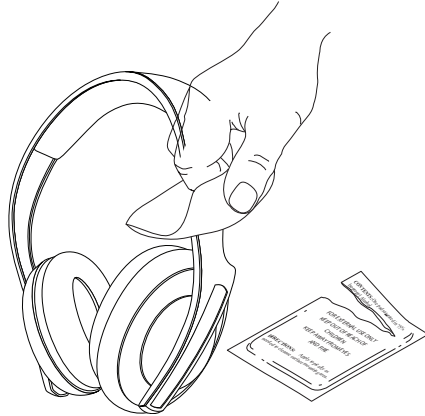


- 2 Open door on sensor. Loosen screw with T-20 bit and remove loop from sensor. Remove clear film from adhesive.

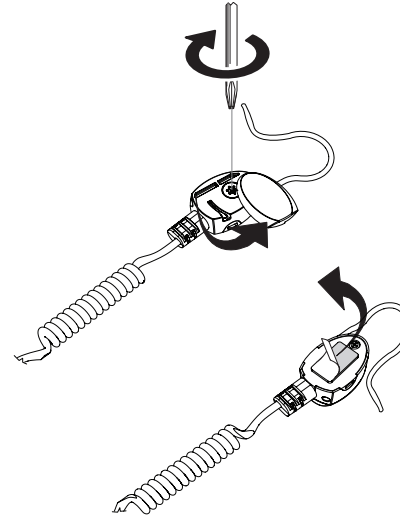

- 3 Press sensor firmly onto merchandise for 10 seconds. Wrap loop around merchandise. Tightly pull loop through sensor and tighten with T-20 bit.

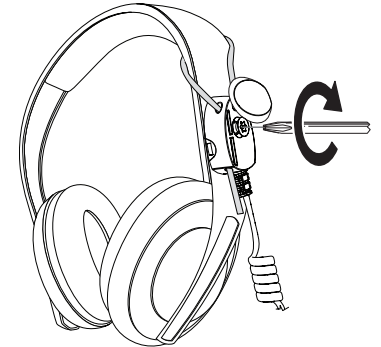


- 3 Close door on sensor.



- 4 Pull zip tie through hole in sensor. Wrap zip tie firmly around merchandise and cut extra zip tie.



- 5 Attach sensor to alarm unit.

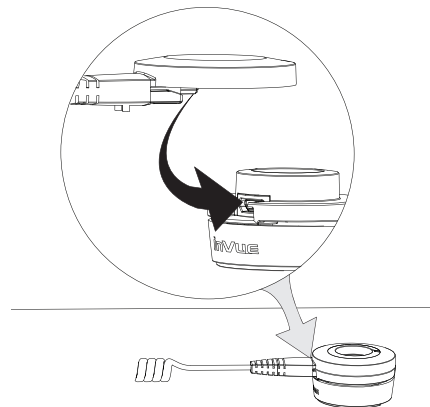

Rev0 03/12/15

INVUE®

www.invuesecurity.com

NA / LATAM // 704.752.6513 • 888.55.INVUE

EMEA // +31.23.8900150

APAC // +852.3127.6811