

S960
iPhone Duo Installation

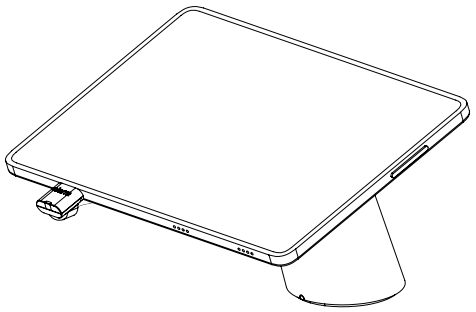


Important:
InVue's handheld device polish kit (ADH2300 or ADH2313) is required for proper adhesion between the display device and the security stand.
The polish kit contains micro-abrasives, that prepare the device surface for proper adhesion on a microscopic level. When the polish kit (micro-abrasive) is properly applied, it is typical that a visible change to the surface is not apparent, however the surface properties are altered to support the required adhesion.
Consult the instructions included with the polish kits for proper usage.


1. Use an alcohol wipe to clean the back of the device with the cameras. Allow it to dry completely.

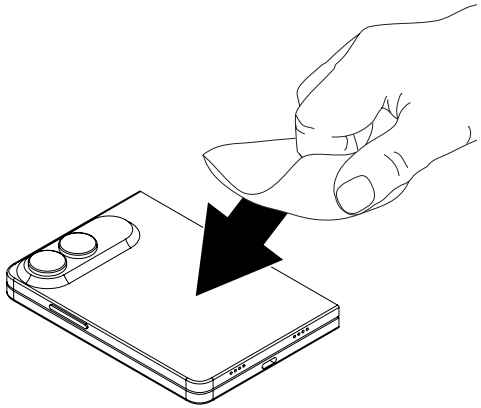


2. Remove the clear film from the DGT208 sensor adhesive.

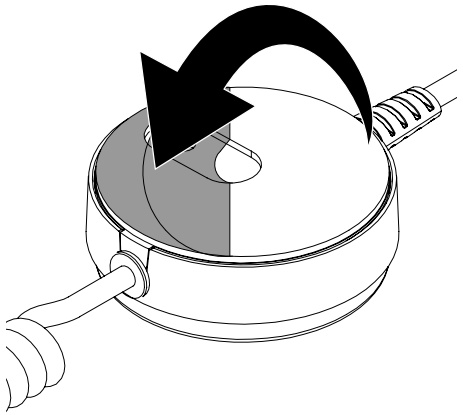


3. Center the sensor medallion onto the camera side of the device.

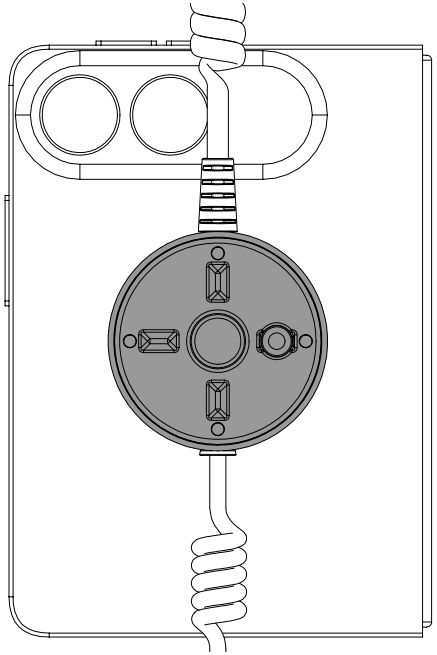


4. Press the sensor against the device for at least 10 seconds.

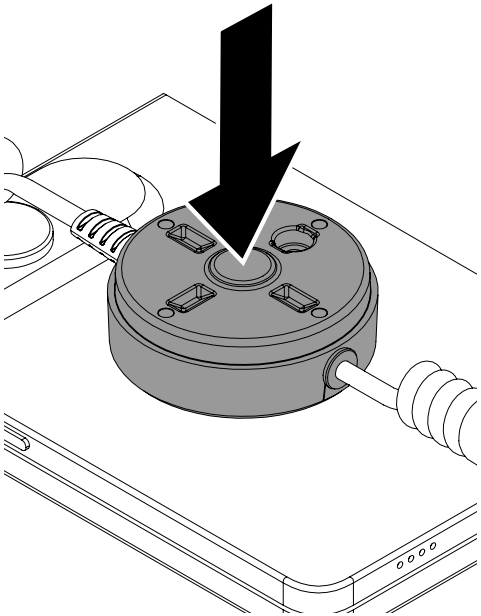


5. Open the device and stretch the power connector cable across the back of the device. Plug the power connector into the device.

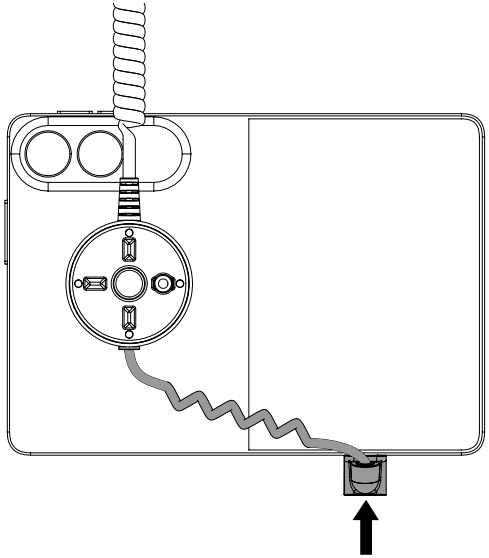


6. Plug the sensor cable into the device.

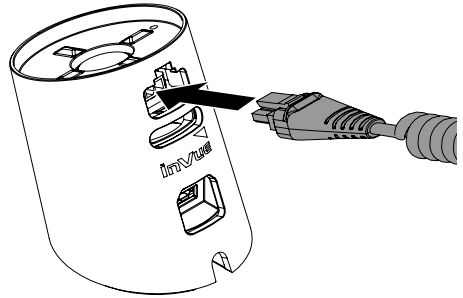

7 Place the sensor and device onto the stand.

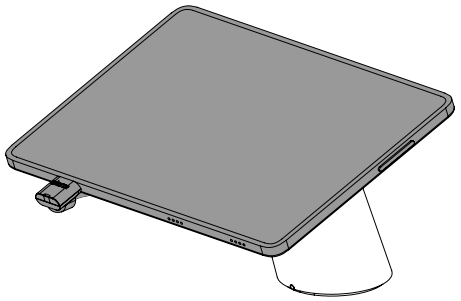

8 The system is armed if both the stand LED & Power Connector LED are illuminated.

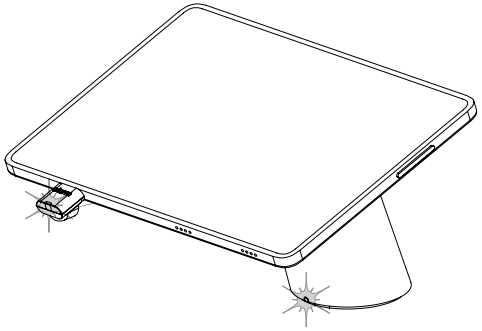

Rev1 10/29/26

www.invue.com

NA / LATAM // 704.752.6513 • 888.55.INVUE
EMEA // +31.23.8900150
APAC // +852.3127.6811

© 2026 InVue Security Products Inc. All rights reserved.
InVue is a registered trademark of InVue Security Products.