

LIVE Slider Lock LL101




- 1 Optional:**
For ease of installation, use an Installer Key (if you have one) to unlock the lock. If using the Installer Key in a lock with the battery tabs in place, it will pause the lock in an unlocked state.




- 2** Use the provided alcohol wipe to clean the edge of the BACK panel where the strike plate will be mounted. Allow it to dry completely.




- 3** Back the 2 plastic screws out to allow it to fit over the panel.

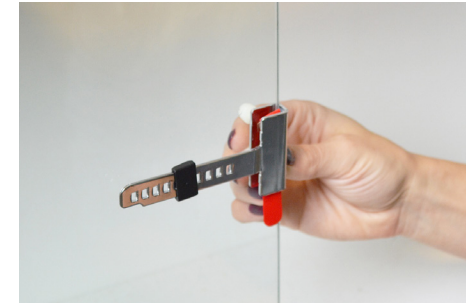

- 4** Place the strike plate onto the back panel.

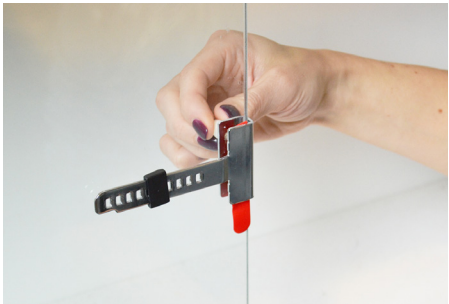

- 5** Lightly tighten the 2 screws to hold the strike plate in place.

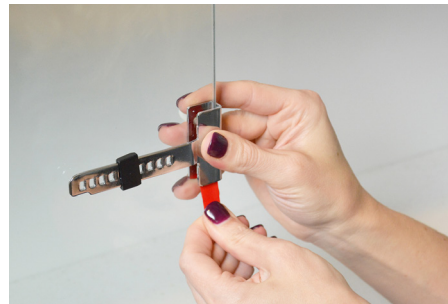

- 6** Pull the red tab to expose the adhesive.
Note: Back the screws off slightly if the tab is not easy to pull.



- 7** Fully tighten the screws.




- 8** Slide the panels into the closed position. The strike plate should emerge from between the 2 panels.

LIVE Slider Lock LL101



- 9 Clean the edge of the front panel near the strike plate. Allow it to dry completely.

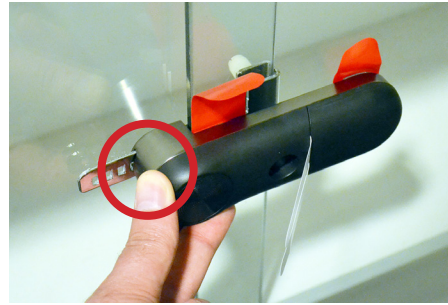

- 10 Slide the lock onto the strike plate.



- 11 Pull the 2 red tabs to expose the adhesives.



- 12 Press the lock against the panel for at least 10 seconds.




- 13 Pull the battery tabs.



- 14a **Lock Activation Using OneKEY:** Place a charged and coded OneKEY against the lens on the lock and press the button the Key. The LED on the Key and the lock will flash green.




- 14b You will have several seconds to slide the door panels open. If the LED on the lock flashes red before the lock is opened, it will need to be unlocked again.

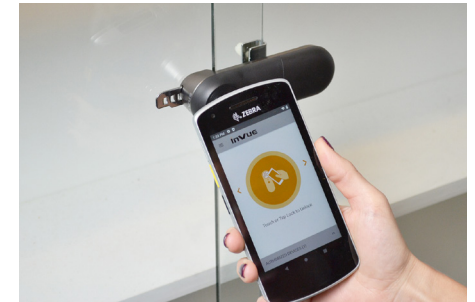

- 15a **Lock Activation Using NFC:** Open the InVue LIVE Access App on your smart device. Tap your device against the round panel on the lock.

LIVE Slider Lock LL101

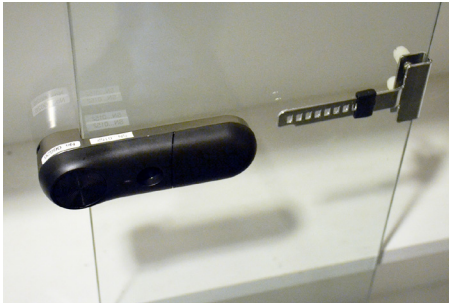

15b Once confirmed by the App displaying “unlocked” and the LED flashing green, you will have several seconds to slide the door panels open. If the LED on the lock flashes red before the lock is opened, it will need to be unlocked again.



16a **Using the 2D Barcode:** Insert a thin edged tool into the small notch between the lock body and the round plate.



16b Remove the panel to reveal the barcode.



17a **Lock Activation Using Scanning Device:** If your smart device has a built in barcode reader, aim and scan the code on the front of the lock while the InVue LIVE Access App is open.



17b Once confirmed by the App displaying “unlocked” and the LED flashing green, you will have several seconds to slide the door panels open. If the LED on the lock flashes red before the lock is opened, it will need to be unlocked again.



18a **Lock Activation Using Device Camera:** Open the InVue LIVE Access App on your smart device and toggle to the “Camera Scan” screen. Center the barcode in the viewfinder.



18b Once confirmed by the App displaying “unlocked” and the LED flashing green, you will have several seconds to slide the door panels open. If the LED on the lock flashes red before the lock is opened, it will need to be unlocked again.



19 **Battery Replacement Steps:** Place a magnet key near the end of the battery panel on the lock. **Note:** Even with low batteries the lock will still function with a OneKEY.

LIVE Slider Lock LL101



20 Remove the battery panel from the lock.



21 Replace the old batteries with new CR123A non-rechargeable lithium batteries.



22 Slide the battery panel back into place.



Warning – Fire, Explosion, Burn Hazard:

InVue recommends the use of Great Power or Energizer CR123A batteries. Use of other batteries, mixing of used and new or different battery chemistries may present a risk of leakage, fire, explosion and serious personal injury. Do not ingest, recharge, misuse, short circuit, improperly store or discard, disassemble or heat above 212°F (100°C). Keep away from children.